

### GPD-LL

Lead-Lined  
(X-Ray)

#### Construction

##### Horizontal Edges:

- Top and bottom rails
- Bonded to core
- Structural composite lumber
- 1" minimum after factory trim

##### Vertical Edges:

- Matching Vertical Edges
- Bonded to core
- Structural composite lumber (SCL) laminated to a matching hardwood face
- Maximum 20 minute fire rating.
- Meets UL 10b and UL 10c Category "B" requirements
- Option to UL 10c Category "A" that require no additional seal system

##### Core:

- Conforms to ANSI A208.1  
Standard LD2 Particle Core -32 lbs cf
- Meets requirements of LEED MR4.1+MR4.2
- Lead Thickness: 1/32" to 3/8"  
Lead thickness must be specified per shielding recommendations

##### Construction Grade:

- Performance: WDMA - Extra Heavy Duty\*
- Aesthetic: WDMA - Premium Grade

##### Faces:

- Available in a variety of domestic and exotic wood species along with MDO (Medium Density Overlay)

##### Veneer Grade:


- Standard - WDMA "A" Book and Running Match
- Slip, Balance Match, and Center Balance Match available upon request
- "AA" available upon request to meet AWI "Premium Grade" requirements

##### Adhesive:

- Type 2 standard, Type 1 (waterproof) optional

##### Finishes:

- Factory Finish meets or exceeds WDMA TR-6 and AWI 1500 standards
- Available in 9 standard colors and custom color match

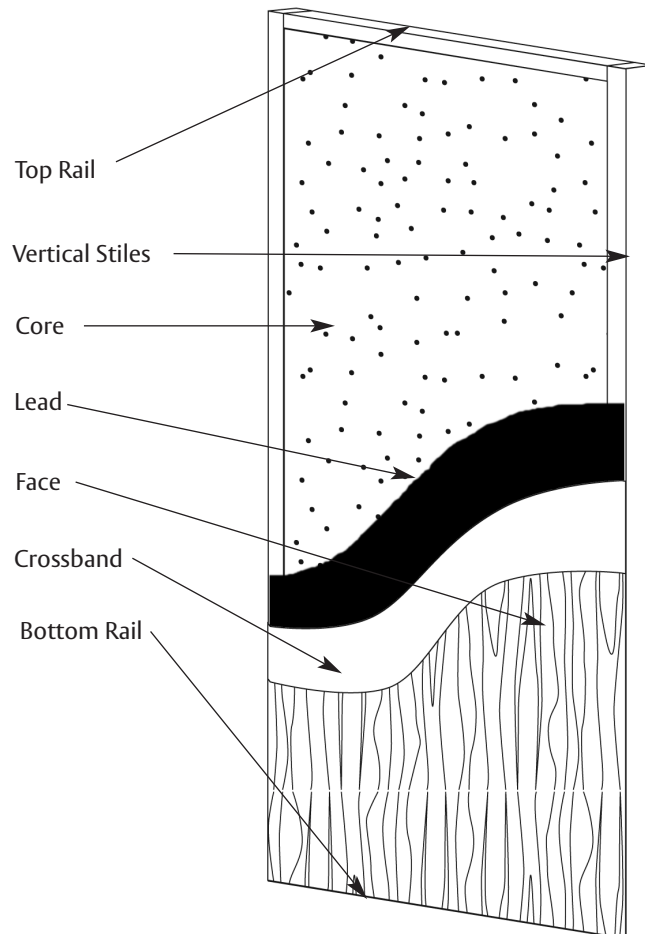

#### Lifetime Warranty Standard

##### LEED 2.2 Credit Options:

- MR 4.1 10% Recycled Content
- MR 4.2 20% Recycled Content

\*Optional blocking required to meet Extra Heavy Duty face screw holding standards.